

2017  
HIGHLIGHTS

Outdoor Luminaire  
Indoor Luminaire  
Lamp  
Grow Light







ANTEYA

Anteya Power is a professional LED lighting company located in Taiwan and Hong Kong, with 15 years experience in R&D and LED lighting production. The trusted partnership with Unity Opto in Taiwan has allowed Anteya Power and its team of professional designers and developers to be able to supply LED lighting products designed and manufactured to the highest standards, with maintained international certificates to satisfy the customers requirements.

In 2017 Anteya Power entered a new era of Green Energy with the development of a 5 year warranted "All In One" Solar Street Light. These street lights utilise high quality batteries and controllers, along with the latest LED's provided by internationally renowned brands such as Epistar, Philips, Cree, and Nichia.

Anteya Power will continue to develop and supply its own brand of 5 year warranted. Industrial Lighting such as High Bay, Low Bay, Flood Lights, Tunnel Lights and Street Lights, for indoor and outdoor applications.

Anteya Power can also offer its own LED Lighting Management Control System , capable of meeting most project requirements.

Anteya Power will always try to supply products which are reasonably priced, but definitely will not sacrifice quality to achieve this aim. It is the main goal of Anteya Power to provide its customers with the highest quality products and service worldwide.



## OUTDOOR LUMINARE

HIGH BAY

4



FLOOD LIGHT

8



URBAN LIGHT  
& STREET LIGHT

10



WALL WASHER  
& CANOPY

17



WEATHER PROOF

18



## INDOOR LUMINARE

PANEL LIGHT

20



SHOP LIGHT

22



DOWN LIGHT

24



TRACK LIGHT

26



DESK LAMP

28



## LAMP

BULB

30



FILAMENT

32



T8 TUBE

36



GU10,MR16

38



AR111

40



## GROW LIGHT

GROW LIGHT

42







# HIGH BAY









## High Bay IP20 100D



DIMENSION



LIGHT DISTRIBUTION




Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan
MPS-HB406200-012	100-240V	5000K	200W	23000lm	80	1-10V dimmable	100°	50,000h
MPS-HB406170-012	100-240V	5000K	170W	17000lm	80	1-10V dimmable	100°	50,000h
MPS-HB406100-012	100-240V	5000K	100W	10000lm	80	1-10V dimmable	100°	50,000h
MPS-HB406070-012	100-240V	5000K	70W	7000lm	80	1-10V dimmable	100°	50,000h

Compliance with UL,CE,CB,CNS


## High Bay IP67 30D



DIMENSION



LIGHT DISTRIBUTION




Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IK Level
MPS-HC406200-2U1	100-240V	4000K	200W	21000lm	80	No	30°	50,000h	08
MPS-HC406150-2U1	100-240V	4000K	150W	15750lm	80	No	30°	50,000h	08
MPS-HC406100-2U1	100-240V	4000K	100W	10500lm	80	No	30°	50,000h	08
MPS-HC506200-2U1	100-240V	5000K	200W	22000lm	80	No	30°	50,000h	08
MPS-HC506150-2U1	100-240V	5000K	150W	16500lm	80	No	30°	50,000h	08
MPS-HC506100-2U1	100-240V	5000K	100W	11000lm	80	No	30°	50,000h	08

Compliance with UL,CE,CB,CNS


## High Bay IP67 60D



DIMENSION



LIGHT DISTRIBUTION



Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IK Level
MPS-HC406200-3U1	100-240V	4000K	200W	21000lm	80	No	60°	50,000h	08
MPS-HC406150-3U1	100-240V	4000K	150W	15750lm	80	No	60°	50,000h	08
MPS-HC406100-3U1	100-240V	4000K	100W	10500lm	80	No	60°	50,000h	08
MPS-HC506200-3U1	100-240V	5000K	200W	22000lm	80	No	60°	50,000h	08
MPS-HC506150-3U1	100-240V	5000K	150W	16500lm	80	No	60°	50,000h	08
MPS-HC506100-3U1	100-240V	5000K	100W	11000lm	80	No	60°	50,000h	08

Compliance with UL,CE,CB,CNS



### High Bay IP67 110D




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IK Level
MPS-HC406200-1U1	100-240V	4000K	200W	21000lm	80	No	110°	50,000h	08
MPS-HC406150-1U1	100-240V	4000K	150W	15750lm	80	No	110°	50,000h	08
MPS-HC406100-1U1	100-240V	4000K	100W	10500lm	80	No	110°	50,000h	08
MPS-HC506200-1U1	100-240V	5000K	200W	22000lm	80	No	110°	50,000h	08
MPS-HC506150-1U1	100-240V	5000K	150W	16500lm	80	No	110°	50,000h	08
MPS-HC506100-1U1	100-240V	5000K	100W	11000lm	80	No	110°	50,000h	08

Compliance with UL,CE,CB,CNS

### High Bay IP67 110D 1-10V dimmable




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IK Level
MPS-HC406200-1U0	100-240V	4000K	200W	21000lm	80	1-10V dimmable	110°	50,000h	08
MPS-HC406150-1U0	100-240V	4000K	150W	15750lm	80	1-10V dimmable	110°	50,000h	08
MPS-HC406100-1U0	100-240V	4000K	100W	10500lm	80	1-10V dimmable	110°	50,000h	08

Compliance with UL,CE,CB,CNS



## FLOOD LIGHT

Anteya flood lights are best described as high-intensity, broad-beamed artificial lights used to illuminate outdoor spatial environments. They can be used in outdoor fields providing steady lumen output and weatherproof functionality.

### Flood Light 100D




DIMENSION

320W	450 x 473 x 405
240W	300 x 473 x 347
160W	300 x 324 x 335
135W	150 x 450 x 199
90W	150 x 300 x 199
45W	150 x 208 x 192
	(L) x (W) x (H)

(mm)

LIGHT DISTRIBUTION



(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MPS-PL406240-6U3	100-240V	4000K	240W	26400lm	75	No	100°	50,000h	67	08
MPS-PL406160-4U3	100-240V	4000K	160W	17600lm	75	No	100°	50,000h	67	08
MPS-PL406135-3U3	100-240V	4000K	135W	14700lm	75	No	100°	50,000h	67	08
MPS-PL406090-2U3	100-240V	4000K	90W	9800lm	75	No	100°	50,000h	67	08
MPS-PL406045-1U3	100-240V	4000K	45W	4900lm	75	No	100°	50,000h	67	08

Compliance with UL,CE,CB,CNS

### Flood Light 60D




DIMENSION

320W	450 x 473 x 405
240W	300 x 473 x 347
160W	300 x 324 x 335
135W	150 x 450 x 199
90W	150 x 300 x 199
45W	150 x 208 x 192
	(L) x (W) x (H)

(mm)

LIGHT DISTRIBUTION



(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MPS-PL406240-6U2	100-240V	4000K	240W	26400lm	75	No	60°	50,000h	67	08
MPS-PL406160-4U2	100-240V	4000K	160W	17600lm	75	No	60°	50,000h	67	08
MPS-PL406135-3U2	100-240V	4000K	135W	14700lm	75	No	60°	50,000h	67	08
MPS-PL406090-2U2	100-240V	4000K	90W	9800lm	75	No	60°	50,000h	67	08
MPS-PL406045-1U2	100-240V	4000K	45W	4900lm	75	No	60°	50,000h	67	08

Compliance with UL,CE,CB,CNS

### Flood Light 30D




DIMENSION

320W	450 x 473 x 405
240W	300 x 473 x 347
160W	300 x 324 x 335
135W	150 x 450 x 199
90W	150 x 300 x 199
45W	150 x 208 x 192
	(L) x (W) x (H)

(mm)

LIGHT DISTRIBUTION




(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MPS-PL406240-6U1	100-240V	4000K	240W	26400lm	75	No	30°	50,000h	67	08
MPS-PL406160-4U1	100-240V	4000K	160W	17600lm	75	No	30°	50,000h	67	08
MPS-PL406135-3U1	100-240V	4000K	135W	14700lm	75	No	30°	50,000h	67	08
MPS-PL406090-2U1	100-240V	4000K	90W	9800lm	75	No	30°	50,000h	67	08
MPS-PL406045-1U1	100-240V	4000K	45W	4900lm	75	No	30°	50,000h	67	08

Compliance with UL,CE,CB,CNS



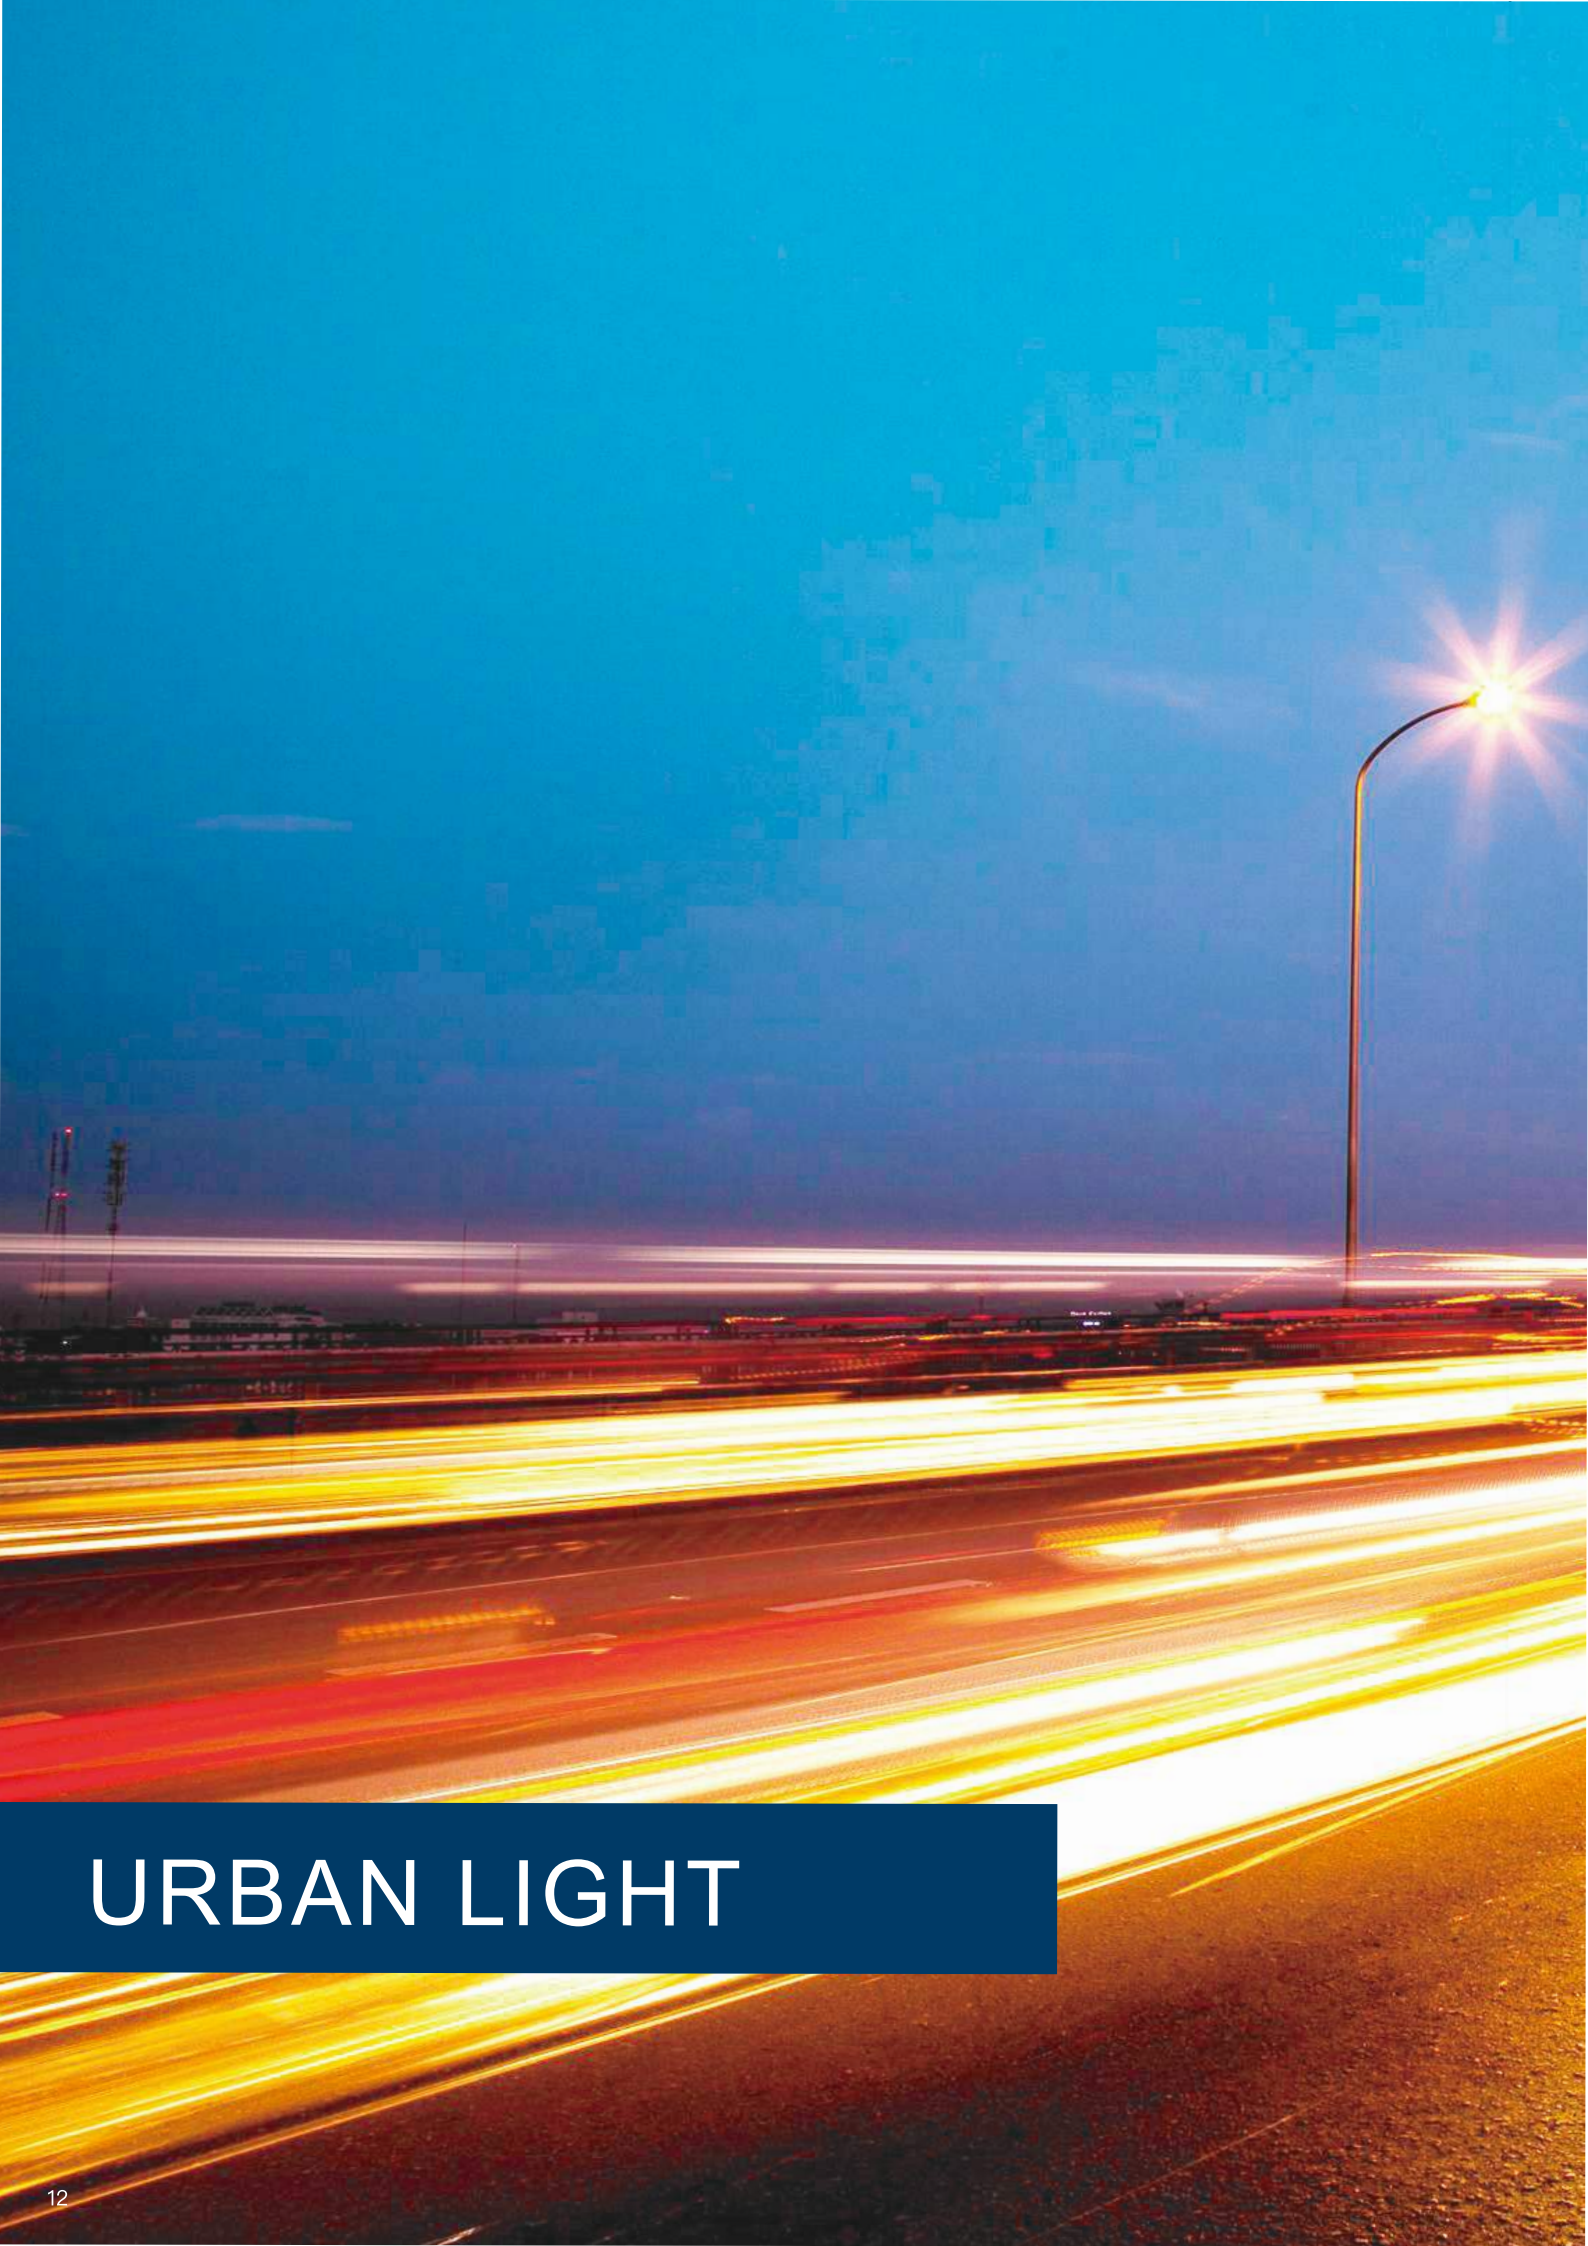

# URBAN LIGHT










## URBAN LIGHT

Anteya urban light provides a high quality and long lifespan solution for residential, park, and urban light applications. The urban light, with CCT of 3000K and high-efficiency, is ideal for IP66 and IK08 applications.


## Urban Light 5000K



DIMENSION



LIGHT DISTRIBUTION




Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MPS-SL50E055-1A2	220-240V	5000K	55W	5885lm	70	No	130°	50,000h	66	08
MPS-SL50E050-1A2	220-240V	5000K	50W	5350lm	70	No	130°	50,000h	66	08
MPS-SL50E040-1A2	220-240V	5000K	42W	4490lm	70	No	130°	50,000h	66	08
MPS-SL50E030-1A2	220-240V	5000K	32W	3420lm	70	No	130°	50,000h	66	08

Compliance with UL,CE,CB,CNS


## Urban Light 4000K



DIMENSION



LIGHT DISTRIBUTION




Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MPS-SL40E055-1A2	220-240V	4000K	55W	5885lm	70	No	130°	50,000h	66	08
MPS-SL40E050-1A2	220-240V	4000K	50W	5350lm	70	No	130°	50,000h	66	08
MPS-SL40E040-1A2	220-240V	4000K	42W	4500lm	70	No	130°	50,000h	66	08
MPS-SL40E030-1A2	220-240V	4000K	32W	3420lm	70	No	130°	50,000h	66	08

Compliance with UL,CE,CB,CNS


## Urban Light 3000K



DIMENSION



LIGHT DISTRIBUTION



Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MPS-SL30E055-1A2	220-240V	3000K	55W	5500lm	70	No	130°	50,000h	66	08
MPS-SL30E050-1A2	220-240V	3000K	50W	5000m	70	No	130°	50,000h	66	08
MPS-SL30E040-1A2	220-240V	3000K	42W	4200lm	70	No	130°	50,000h	66	08
MPS-SL30E030-1A2	220-240V	3000K	32W	3200lm	70	No	130°	50,000h	66	08

Compliance with UL,CE,CB,CNS



## STREET LIGHT


Anteya street light provides a high quality lighting and long lifespan solution for residential, industrial areas and main roads. The highly efficient street light is ideal for IP66 and IK08 applications.




### Street Light - Firestone 5000K



DIMENSION



LIGHT DISTRIBUTION




Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MPS-SL50E110-2A2	220-240V	5000K	110W	11770lm	70	No	130°	50,000h	66	08
MPS-SL50E100-2A2	220-240V	5000K	100W	10700lm	70	No	130°	50,000h	66	08
MPS-SL50E090-2A2	220-240V	5000K	90W	9630lm	70	No	130°	50,000h	66	08
MPS-SL50E080-2A2	220-240V	5000K	80W	8560lm	70	No	130°	50,000h	66	08
MPS-SL50E070-2A2	220-240V	5000K	70W	7490lm	70	No	130°	50,000h	66	08
MPS-SL50E060-2A2	220-240V	5000K	60W	6420lm	70	No	130°	50,000h	66	08

Compliance with UL,CE,CB,CNS


### Street Light - Firestone 4000K



DIMENSION



LIGHT DISTRIBUTION




Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MPS-SL40E110-2A2	220-240V	4000K	110W	11770lm	70	No	130°	50,000h	66	08
MPS-SL40E100-2A2	220-240V	4000K	100W	10700lm	70	No	130°	50,000h	66	08
MPS-SL40E090-2A2	220-240V	4000K	90W	9630lm	70	No	130°	50,000h	66	08
MPS-SL40E080-2A2	220-240V	4000K	80W	8560lm	70	No	130°	50,000h	66	08
MPS-SL40E070-2A2	220-240V	4000K	70W	7490lm	70	No	130°	50,000h	66	08
MPS-SL40E060-2A2	220-240V	4000K	60W	6420lm	70	No	130°	50,000h	66	08

Compliance with UL,CE,CB,CNS


### Street Light - Firestone 3000K



DIMENSION



LIGHT DISTRIBUTION




Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MPS-SL30E110-2A2	220-240V	3000K	110W	11000lm	70	No	130°	50,000h	66	08
MPS-SL30E100-2A2	220-240V	3000K	100W	10000lm	70	No	130°	50,000h	66	08
MPS-SL30E090-2A2	220-240V	3000K	90W	9000lm	70	No	130°	50,000h	66	08
MPS-SL30E080-2A2	220-240V	3000K	80W	8000lm	70	No	130°	50,000h	66	08
MPS-SL30E070-2A2	220-240V	3000K	70W	7000lm	70	No	130°	50,000h	66	08
MPS-SL30E060-2A2	220-240V	3000K	60W	6000lm	70	No	130°	50,000h	66	08

Compliance with UL,CE,CB,CNS




## Street Light - Titanium 5000K

DIMENSION



LIGHT DISTRIBUTION




Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MPS-SL50E185-3A2	220-240V	5000K	185W	18870lm	70	No	130°	50,000h	66	08
MPS-SL50E150-3A2	220-240V	5000K	150W	16050lm	70	No	130°	50,000h	66	08
MPS-SL50E140-3A2	220-240V	5000K	140W	14980lm	70	No	130°	50,000h	66	08
MPS-SL50E130-3A2	220-240V	5000K	130W	13910lm	70	No	130°	50,000h	66	08
MPS-SL50E120-3A2	220-240V	5000K	120W	12840lm	70	No	130°	50,000h	66	08

Compliance with UL,CE,CB,CNS




## Street Light - Titanium 4000K

DIMENSION



LIGHT DISTRIBUTION




Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MPS-SL40E185-3A2	220-240V	4000K	185W	18870lm	70	No	130°	50,000h	66	08
MPS-SL40E150-3A2	220-240V	4000K	150W	16050lm	70	No	130°	50,000h	66	08
MPS-SL40E140-3A2	220-240V	4000K	140W	14980lm	70	No	130°	50,000h	66	08
MPS-SL40E130-3A2	220-240V	4000K	130W	13910lm	70	No	130°	50,000h	66	08
MPS-SL40E120-3A2	220-240V	4000K	120W	12840lm	70	No	130°	50,000h	66	08

Compliance with UL,CE,CB,CNS




## Street Light - Titanium 3000K

DIMENSION



LIGHT DISTRIBUTION




Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MPS-SL30E185-3A2	220-240V	3000K	185W	17950lm	70	No	130°	50,000h	66	08
MPS-SL30E150-3A2	220-240V	3000K	150W	15000lm	70	No	130°	50,000h	66	08
MPS-SL30E140-3A2	220-240V	3000K	140W	14000lm	70	No	130°	50,000h	66	08
MPS-SL30E130-3A2	220-240V	3000K	130W	13000lm	70	No	130°	50,000h	66	08
MPS-SL30E120-3A2	220-240V	3000K	120W	12000lm	70	No	130°	50,000h	66	08

Compliance with UL,CE,CB,CNS




### Wall washer

DIMENSION



LIGHT DISTRIBUTION




Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MPS-CL50E1001AU1	220-240V	5000K	100W	10500lm	80	No	90°	50,000h	66	08
MPS-CL50E0651AU1	220-240V	5000K	65W	7600lm	80	No	90°	50,000h	66	08

Compliance with UL,CE,CB,CNS


### Canopy 90D



DIMENSION



LIGHT DISTRIBUTION



Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MPS-CL50E1000AU1	220-240V	5000K	100W	10500lm	80	No	90°	50,000h	66	08
MPS-CL50E0650AU1	220-240V	5000K	65W	7600lm	80	No	90°	50,000h	66	08

Compliance with UL,CE,CB,CNS



## WEATHER PROOF


Anteya LED weather proof lights with IP65 have been specifically developed with an excellent efficacy of 105 lm/W. They are widely suitable for underground parking, warehouse which is designed for best replacement of waterproof fluorescent fittings.




### Weather proof - 2feet



DIMENSION



LIGHT DISTRIBUTION




Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MMR-WP65120ABC02	100-240V	6500K	20W	2050lm	80	No	130°	40,000h	65	08
MMR-WP40120ABC02	100-240V	4000K	20W	2050lm	80	No	130°	40,000h	65	08

Compliance with UL,CE,CB,CNS


### Weather proof - 4feet



DIMENSION



LIGHT DISTRIBUTION




Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MMR-WP65140CBC02	100-240V	6500K	40W	4100lm	80	No	130°	50,000h	65	08
MMR-WP40140CBC02	100-240V	4000K	40W	4100lm	80	No	130°	50,000h	65	08

Compliance with UL,CE,CB,CNS


### Weather proof - 5feet



DIMENSION




LIGHT DISTRIBUTION



Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	IP Level	IK Level
MMR-WP65156DBC02	100-240V	6500K	56W	6000lm	80	No	130°	50,000h	65	08
MMR-WP40156DBC02	100-240V	4000K	56W	6000lm	80	No	130°	50,000h	65	08


Compliance with UL,CE,CB,CNS

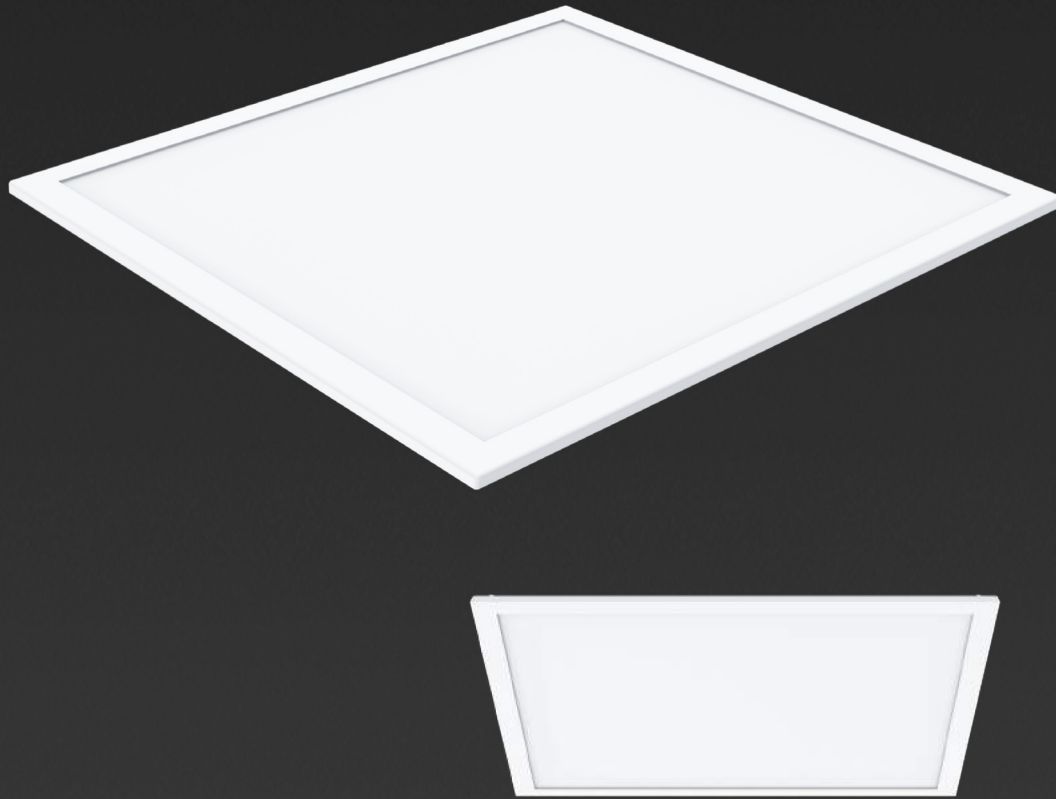

## PANEL LIGHT


Anteya LED panel lights are thin, energy-efficient and achieve substantial savings along with a significant reduction in maintenance costs. They are perfect for use in offices, hospitals care facilities and commercial installations. They can be installed flush in ceilings easily or suspended using special, easy-to install mounts.



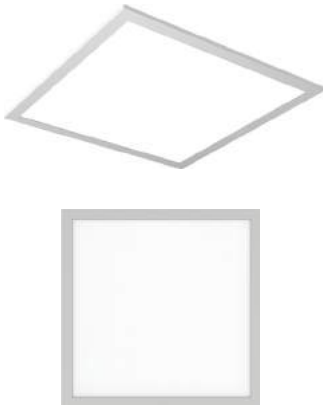


### Panel Lighting 2x2C

DIMENSION



(mm)


LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Dimension
MPS-FL404038-CXX	100-240V	4000K	38W	3400lm	80	No	100°	24,000h	600x600x23

Compliance with UL,CE,CB,CNS




### Panel Lighting 1x4

DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Dimension
MPS-FL402050-RXX	110V	4000K	50W	4000lm	80	Yes	100°	25,000h	1200x300x23

Compliance with UL,CE,CB,CNS



## SHOP LIGHT


UOT LED shop light is perfect for hanging or flush mount installation. It's excellent efficiency results in substantial energy savings without compromising light levels or quality and is easily installed.






### Shop light 2 feet

DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Dimension
MMR-SL50119ACA38	100-277V	5000K	19W	1650lm	80	No	150°	50,000h	590×123×42

Compliance with UL,CE,CB,CNS




### Shop light 4 feet

DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Dimension
MMR-SL50138CCA38	100-277V	5000K	38W	3600lm	80	No	150°	50,000h	1200×123×42

Compliance with UL,CE,CB,CNS



## DOWN LIGHT


Anteya Down Light is the perfect choice, the classic slim design make this down light attractive for your ceilings. They are thin, high efficient and achieve substantial savings along with a significant reduction in maintenance costs.



### Down light 4 inch 10W




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Cut off
MMR-DLPW110A2-5X	100-240V	5000K	10W	750lm	80	No	90°	20,000h	Φ101
MMR-DLWW110A2-5X	100-240V	3000K	10W	700lm	80	No	90°	20,000h	Φ101

Compliance with UL,CE,CB,CNS

### Down light 6 inch 14W




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Cut off
MMR-DLPW114A2-5X	100-240V	5000K	14W	1100lm	80	No	100°	20,000h	Φ127-155
MMR-DLWW114A2-5X	100-240V	3000K	14W	1000lm	80	No	100°	20,000h	Φ127-155

Compliance with UL,CE,CB,CNS

### 6 inch Panel Down Light




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Cut off	IP Level
MMR-DC30413A0-C01	100-240V	3000K	13W	700lm	80	No	100°	25,000h	Φ150	44
MMR-DL40413A0-C01	100-240V	4000K	13W	800lm	80	No	100°	25,000h	Φ150	44

Compliance with UL,CE,CB,CNS

### 8 inch Panel Down Light




DIMENSION



(mm)


LIGHT DISTRIBUTION



(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Cut off	IP Level
MMR-DL30418A0-CO1	100-240V	3000K	18W	1000lm	80	No	100°	25,000h	Φ200	44
MMR-DL40418A0-CO1	100-240V	4000K	18W	1100lm	80	No	100°	25,000h	Φ200	44

Compliance with UL,CE,CB,CNS

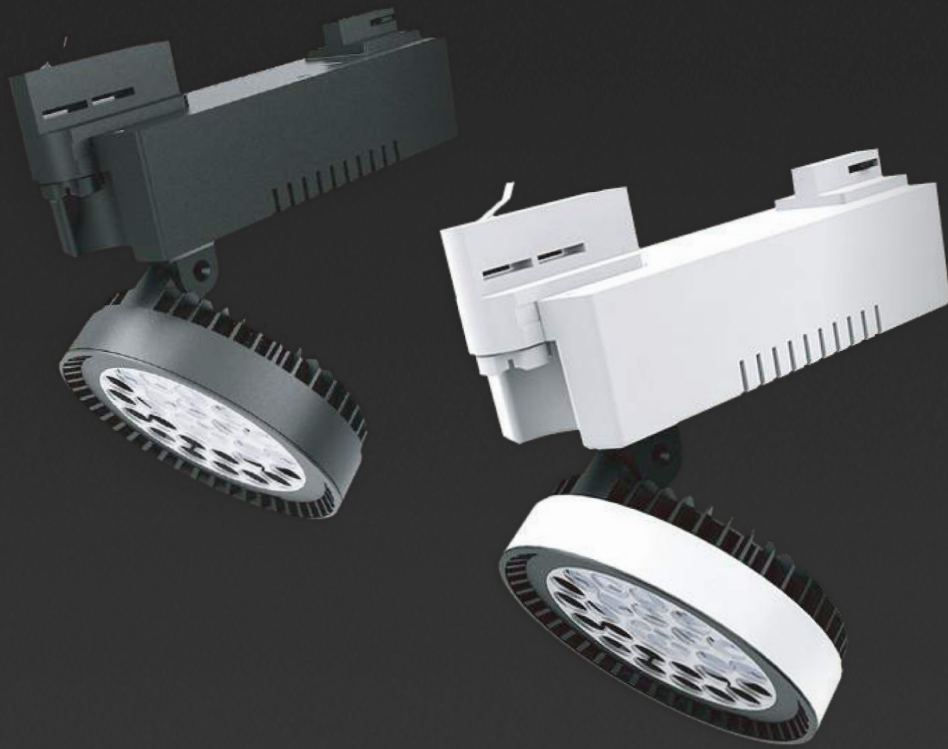


## TRACK LIGHT / ADJUSTABLE

Anteya LED track light combines streamlined design with high efficacy and is the ideal fixture for accent and display applications. Offering dynamic design, powerful accent, full flexibility, and high quality illumination, it provides you multiple options for your indoor ambience needs.

### Track Light 60D




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Color
MMR-TRWA44060-01	100-240V	3000K	38W	2700lm	90	No	60	25,000h	black
MMR-TRNW44060-01	100-240V	4000K	38W	2900lm	90	No	60	25,000h	black
MMR-TRWA44060-02	100-240V	3000K	38W	2700lm	90	No	60	25,000h	white
MMR-TRNW44060-02	100-240V	4000K	38W	2900lm	90	No	60	25,000h	white

Compliance with UL,CE,CB,CNS

### Track Light 30D




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Color
MMR-TRWA44030-12	100-240V	3000K	38W	2700lm	90	No	30	25,000h	black
MMR-TRNW44030-12	100-240V	4000K	38W	2900lm	90	No	30	25,000h	black
MMR-TRWA44030-13	100-240V	3000K	38W	2700lm	90	No	30	25,000h	white
MMR-TRNW44030-13	100-240V	4000K	38W	2900lm	90	No	30	25,000h	white

Compliance with UL,CE,CB,CNS

### Adjustable Down Light




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Dimension
MMR-DLWA43630-05	100-277V	3000K	36W	3200lm	90	No	25°	25,000h	Φ186×151mm
MMR-DLNW43630-05	100-277V	4000K	36W	3300lm	90	No	25°	25,000h	Φ186×151mm

Compliance with UL,CE,CB,CNS



## DESK LAMP

This Anteya Swan Touch is a great idea for those who want the perfect natural light, with its desirable features of low blue light, no flickering and excellent 90 CRI, this desk lamp will bring you the best experience in reading and precisely reflect the true color of objects. Together with other provocative features, including USB port where you can easily charge your mobile device. Its smooth touch panel with the led light that can adjust the brightness and color temperature between 3000K ~5000K. With this eye caring and stylish Anteya Swan Touch Desk Lamp ensure you the best performance in lighting.






### Swan Touch Desk Lamp

DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Illuminaus	Onnect Port	Lifespan	Color
MMR-DSMLA15A2-B	100-240V	3000~5000K (4 Step Tunable)	15W	450lm (4 Step Dimmable)	90	1100 Lux @25cm	USB	25,000h	Black
MMR-DSMLA15A2-W	100-240V	3000~5000K (4 Step Tunable)	15W	450lm (4 Step Dimmable)	90	1100 Lux @35cm	USB	25,000h	White

Compliance with UL,CE,CB,CNS




### Swan Classic Desk Lamp

DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Illuminaus	Lifespan	Color
MMR-DSMLA10A2-11B	100-240V	3000~5000K (Tunable)	10W	450lm (Dimmable)	90	1100 Lux @25cm	25,000h	Black
MMR-DSMLA10A2-10B	100-240V	3000~5000K (Tunable)	10W	450lm (Dimmable)	90	1100 Lux @35cm	25,000h	White

Compliance with UL,CE,CB,CNS



## BULB


Anteya's dimmable light bulb with 80 CRI is the perfect product to replace the very popular 60W incandescent bulb. Color temperature options of 2700K and 4000K offer the most comfortable ambience for your room.



## A60 Bulb 9W




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Socket
MMR-27WW409B0SB0	100-240V	3000K	9W	810lm	80	No	200°	24,000h	E27
MMR-27PW409B0SB0	100-240V	5000K	9W	855lm	80	No	200°	24,000h	E27

Compliance with UL,CE,CB,CNS

## A60 Bulb 12W




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Socket
MMR-27WW412B0SB0	100-240V	3000K	12W	1055lm	80	No	200°	24,000h	E27
MMR-27PW412B0SB0	100-240V	5000K	12W	1100lm	80	No	200°	24,000h	E27

Compliance with UL,CE,CB,CNS

## A60 Bulb 14W




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Socket
MMR-27WW414B0SB0	100-240V	3000K	14W	1300lm	80	No	200°	24,000h	E27
MMR-27PW414B0SB0	100-240V	5000K	14W	1365lm	80	No	200°	24,000h	E27

Compliance with UL,CE,CB,CNS

## A60 Bulb 15W




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Socket
MMR-27WW415B0SB0	100-240V	3000K	15W	1521lm	80	No	200°	24,000h	E27
MMR-27PW415B0SB0	100-240V	5000K	15W	1521lm	80	No	200°	24,000h	E27

Compliance with UL,CE,CB,CNS



## A19 FILAMENT

Featuring a classic heritage design, Anteya filament light bulb delivers timeless design of an incandescent lamp, with the energy efficiency of LED. Its decorative warm-white light have become increasingly popular in restaurants, lobbies and even homes over the few years, with a wide beam angle offers you the most comfortable ambience atmosphere.






## A19 Filament

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Socket
MMR-27SW2D5C6F51	110V	2700K	5W	470lm	80	No	320°	15,000h	E27
MMR-27SW2G5C6F52	110V	2700K	7.5W	806lm	80	No	320°	15,000h	E27


Compliance with UL,CE,CB,CNS

DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)






C35,CL35 FILAMENT




### C35 Filament 2.5W E14

DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Socket
MMR-14SW2B5C6F05	110V	2700K	2.5W	250lm	80	No	320°	15,000h	E14

Compliance with UL,CE,CB,CNS




### C35 Filament 5W E14

DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Socket
MMR-14SW2D5C6F02	110V	2700K	5w	470lm	80	No	320°	15,000h	E14

Compliance with UL,CE,CB,CNS




### CL35 Filament 2.5W E14

DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Socket
MMR-14SW2B5C6F07	110V	2700K	2.5W	250lm	80	No	320°	15,000h	E14

Compliance with UL,CE,CB,CNS




### CL35 Filament 5W E14

DIMENSION



(mm)


LIGHT DISTRIBUTION



(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Socket
MMR-14SW2D5C6F04	110V	2700K	5W	470lm	80	No	320°	15,000h	E14

Compliance with UL,CE,CB,CNS

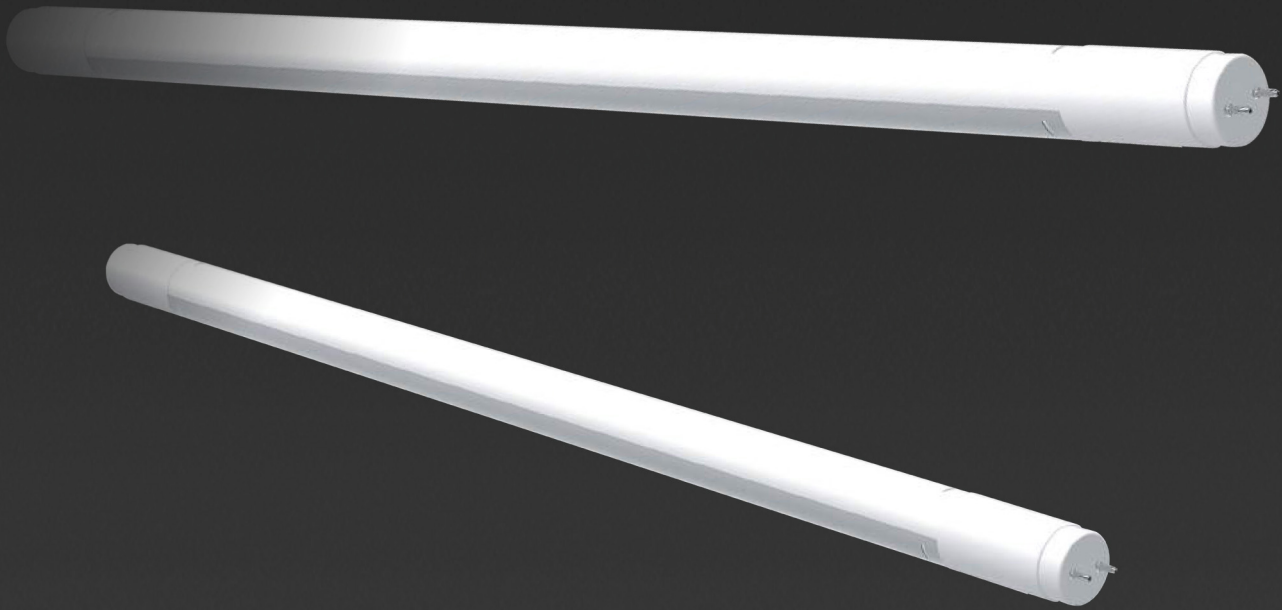

## T8 tube


Anteya's CRI lumen T8 tube is extremely efficient, resulting in substantial energy savings without sacrificing lumen levels or light quality.



### LED High CRI Plastic Tube - 2 feet




DIMENSION



(mm)

LIGHT DISTRIBUTION




(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Dimension
MMR-T83010960-G5	100-240V	3000K	9.5W	750lm	90	No	210°	50,000h	Φ27×594mm
MMR-T85010960-G5	100-240V	5000K	9.5W	850lm	90	No	210°	50,000h	Φ27×594mm

### LED High CRI Plastic Tube - 4 feet




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Dimension
MMR-T830119A2-G4	100-240V	3000K	19W	1700lm	90	No	210°	50,000h	Φ27×1212mm
MMR-T850119A2-G4	100-240V	5000K	19W	1800lm	90	No	210°	50,000h	Φ27×1212mm



## PAR16

The new PAR16 one-piece design shines with 90CRI. It is the perfect product to replace any 50W PAR16 halogen lamp and saves up to 90% on energy. The range of different color temperatures will adapt to any installation requirements.

## MR16

Anteya MR16 LED lamp is designed to replace the low voltage halogen lamps of 35W. Excellent 90 CRI makes colors closer to true. It's suitable for both accent and general lighting.






### MR16 35W 34D




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Socket	Dimension
MMR-16WAA0530-20	DC12V	3000K	5W	350lm	90	No	34D	15,000h	GU5.3	49×49×46

Compliance with UL,CE,CB,CNS

### PAR16 50W 34D




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Socket	Dimension
MMR-10WHN0534C01	230V	3000K	5W	350lm	90	Yes	34D	15,000h	GU10	49×49×55
MMR-10WHP0534C03	230V	3000K	5W	350lm	90	No	34D	15,000h	GU10	49×49×55

Compliance with UL,CE,CB,CNS






## AR111

Anteya AR111 lamps are ideally suitable to spot light applications and are extensively used in retail environments to highlight merchandise. The elegant design of reflector and light guide make the light spot like light effect of traditional halogen.

## LED AR111 – 17W 24D




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Dimension
MMR- ARWHN1724-05	230V	3000K	17W	1250lm	90	Yes	24°	25,000h	Φ111×67.8mm
MMR- ARNHN1724-05	230V	4000K	17W	1300lm	90	Yes	24°	25,000h	Φ111×67.8mm

Compliance with UL,CE,CB,CNS

## LED AR111 – 17W 40D




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Dimension
MMR- ARWHN1740-05	230V	3000K	17W	1250lm	90	Yes	40°	25,000h	Φ111×67.8mm
MMR- ARNHN1740-05	230V	4000K	17W	1300lm	90	Yes	40°	25,000h	Φ111×67.8mm

Compliance with UL,CE,CB,CNS

## LED AR111 – 12W 24D




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Dimension
MMR- ARWHA1224-01	12V	3000K	12W	840lm	90	No	24°	25,000h	Φ111×63mm
MMR- ARNHA1224-01	12V	4000K	12W	920lm	90	No	24°	25,000h	Φ111×63mm

Compliance with UL,CE,CB,CNS

## LED AR111 – 12W 40D




DIMENSION



(mm)


LIGHT DISTRIBUTION



(ck/klm)

Part Number	Rated Voltage	CCT	Watt	Flux	CRI	Dim	Beam Angle	Lifespan	Dimension
MMR- ARWHA1240-01	12V	3000K	12W	840lm	90	No	40°	25,000h	Φ111×63mm
MMR- ARNHA1240-01	12V	4000K	12W	920lm	90	No	40°	25,000h	Φ111×63mm

Compliance with UL,CE,CB,CNS

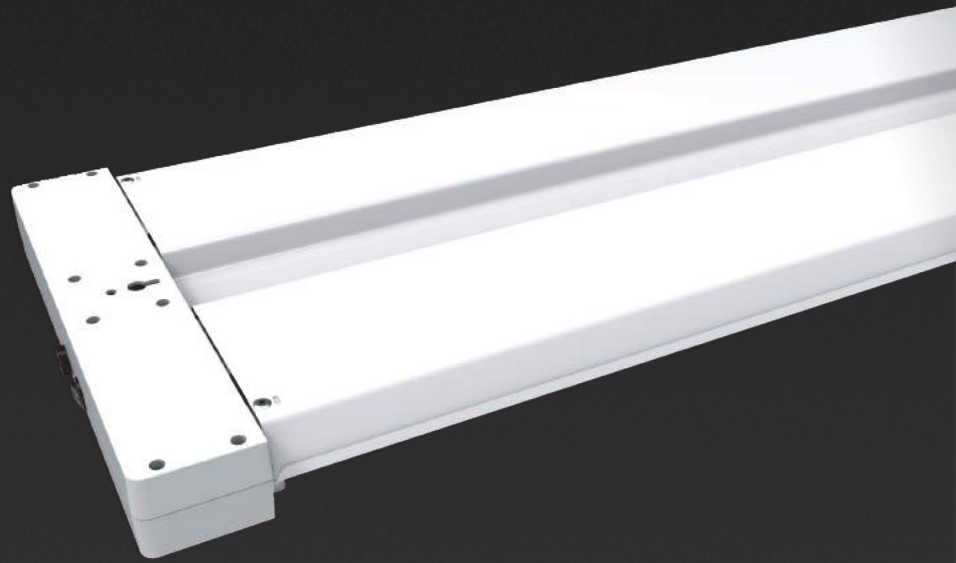

## GROW LIGHT


Anteya LED Grow Light features red and blue spectrum for all your growing plant needs. It emits more light in the useful 450nm blue and 655 nm red spectrum than regular white light LED bulb, with its easy installation into standard socket is a perfect choice for root formation, plant growth and flowering.



## 2 feet Grow Light Dual




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	Wavelength	Watt	PAR Output	Beam Angle	Lifespan	Socket
MMR-SL10619ACCS34	220-240V	450&655nm	19W	25 umol/s	110°	25,000h	NA

Compliance with UL,CE,CB,CNS

## 4 feet Grow Light Quad




DIMENSION



(mm)

LIGHT DISTRIBUTION



(ck/klm)


Part Number	Rated Voltage	Wavelength	Watt	PAR Output	Beam Angle	Lifespan	Socket
MMR-SL10676CES34	220-240V	450&655nm	76W	100 umol/s	110°	25,000h	NA

Compliance with UL,CE,CB,CNS

## Grow Light A60 / BR30




DIMENSION A60




(mm)

DIMENSION BR30




(mm)

LIGHT DISTRIBUTION A60



(ck/klm)

LIGHT DISTRIBUTION BR30



(ck/klm)

Part Number	Rated Voltage	Wavelength	Watt	PAR Output	Beam Angle	Lifespan	Socket	Item
MMR-27MC409A1SB1	230V	450&655nm	9W	8.7 umol/s	110°	15,000h	E27	A60
MMR-BRMC609A2-01	230V	450&655nm	9W	10.2 umol/s	110°	15,000h	E27	BR30

Compliance with UL,CE,CB,CNS







**ANTEYA**

Anteya Power Limited  
Taipei, Taiwan (R.O.C)

T+886-2-87869932

[info@anteyapower.com](mailto:info@anteyapower.com)